

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 22 TOWNSHIP 17 RANGE 5

DATE: -10-6-99- 8-16-04

PARTY CHIEF: -Kiste- Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 2-17-93

IN. S.P.C. E ZONE, NAD 83

NAME: 17052202

N: 517891.7360(m)

E: 75976.9890(m)

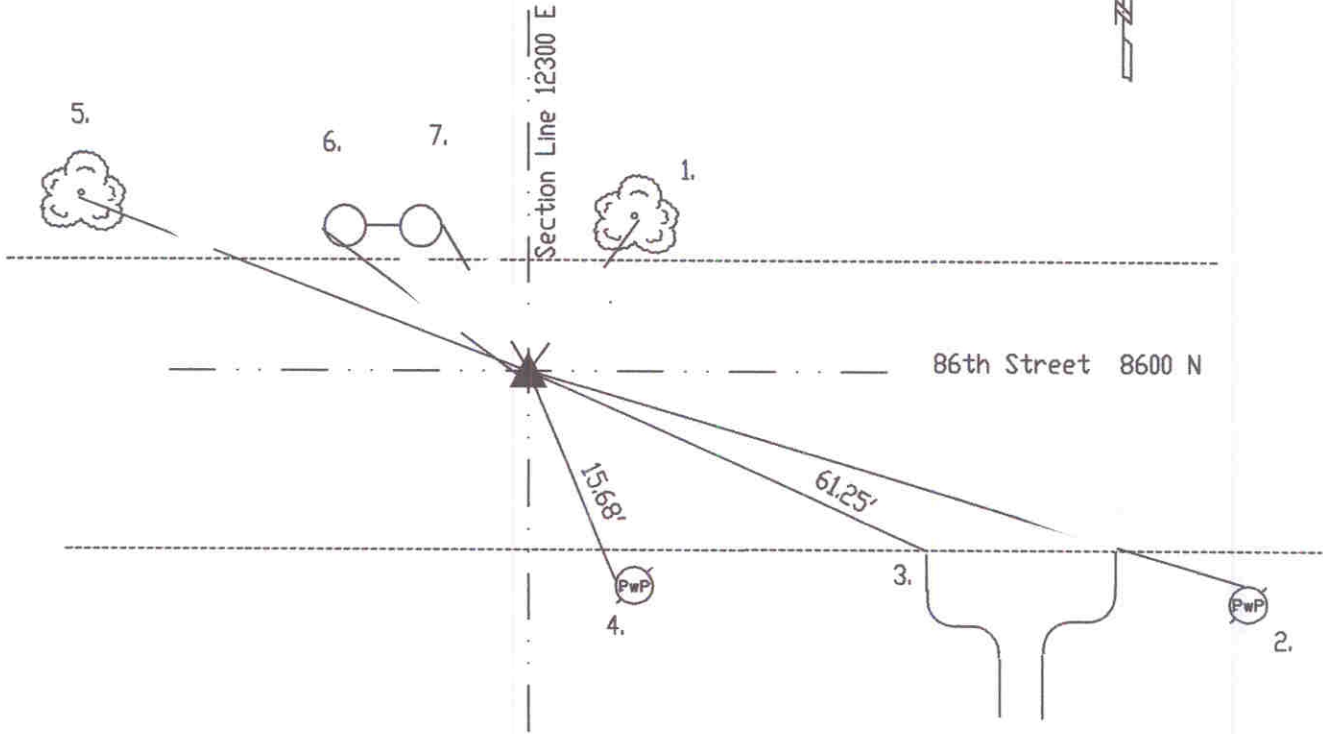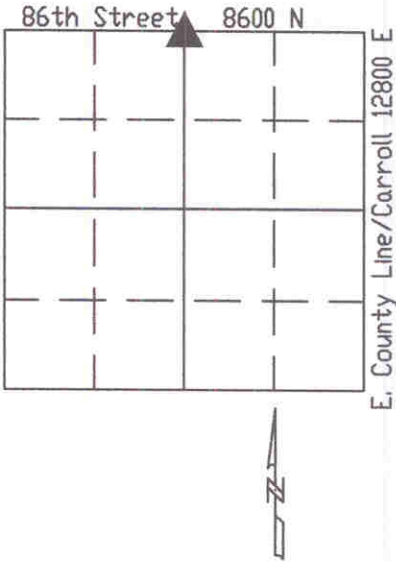

Original post set 1821 by Wm. B. Laughlin with witnesses: 6" beech S 54 E 14 links, 10" beech N 62 W 15 links per Marion County Atlas pg. 16. Legal survey by Wm. P. Smith 5-1866 called corner "E" per Lawrence Township Legal Survey Book pg. 7. We believe, however, that the 7th note---"one original standing (sic) is for "E". Voorhis 6-1869 per Lawrence Township Legal Survey Book pg. 11 does not identify corner. 9-17-53 Cathcart called for stone. 10-25-74 Cripe called for stone with cut 'x' 4' down. PK nail was set over stone. 4-24-75 Fortner called PK nail over stone. Excavated 6-11-82 by Wilcoxon. Hole 2'x2'x30" was dug. No surface monument. Stone found 6' down. Stone 10"x10"x18" with high point found. Set Harrison. Re-tied 2-17-93 by Kiste. Re-tied 10-6-99 by Kiste.

HC752202

| REF. | DISTANCE          | DESCRIPTION  |
|------|-------------------|--|
| 1.   | <del>19.74'</del> | <del>Doat spike E 24' beech 36' up</del>             |
| 2.   | 109.86'           | Mag nail w/washer N PwP#309-221 GB 18' up            |
| 3.   | 61.25'            | NE corner of concrete drive for ADDRESS 12305        |
| 4.   | 15.68'            | PK nail W PwP#23-221 GB 18' up                       |
| 5.   | <del>38.42'</del> | <del>Mag nail w/MCSB washer S 48' maple 10' up</del> |
| 6.   | <del>33.58'</del> | <del>PK nail in bottle cap W side post</del>         |
| 7.   | <del>21.00'</del> | <del>PK nail in bottle cap E side post</del>         |
|      |                   |  |
|      |                   |  |
|      |                   |  |